

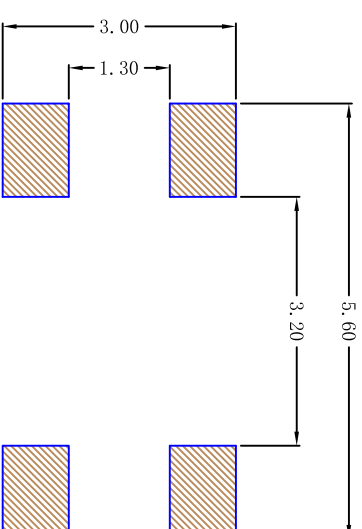



P.C.B MOUNTING PATTERN DIMENSION
the following soldering are recommended
for reflow soldering



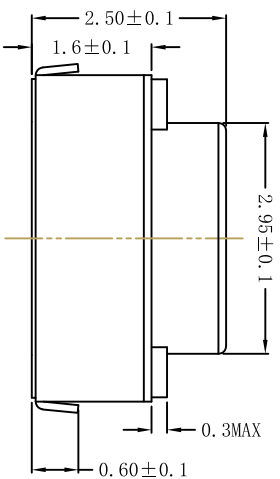


CIRCUIT DIAGRAM



技术参数

NO	项 目	参 数
1	额定电流	50mA 12V DC
2	接触电阻	$\leq 100\text{m}\Omega$
3	按 力	$260 \pm 50\text{gf}$
4	行 程	$0.2 \pm 0.1\text{mm}$
5	绝缘电阻	$> 100\text{M}\Omega$
6	抗电强度	250V 50Hz 1Min
7	寿 命	100, 000 cyc

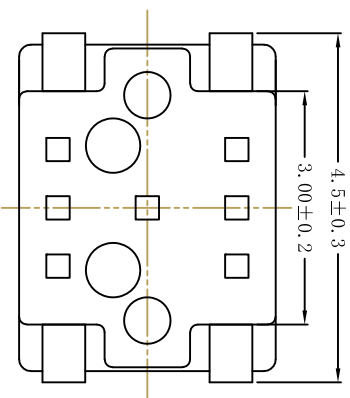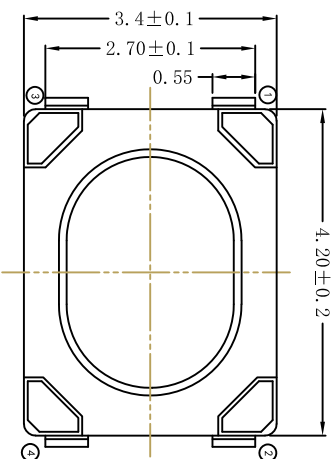

5	Push-button	Rubber	Blue	-----
4	Cover	Brass	-----	AgNi Plated
3	Reed	SUS	-----	Silver Plated
2	Terminal	Bronze	-----	AgNi Plated
1	Housing	LCP	White	-----
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
20121110 单位 比例 5:1 		产品名称	轻触开关	
		产品型号	TACT SWITCH	
			3.2*4.2 硅胶按柄	

借(通)用件登记	
描 图	
描 校	
旧底图总号	
底图总号	
签 字	
日 期	