

## Description

The S339 consists of four independent voltage comparators designed to operate from a single power supply over a wide voltage range.

## Features

- Single Supply Operation: 2V to 36V.
- Dual Supply Operation:  $\pm 1V$  to  $\pm 18V$ .
- Allow Comparison of Voltages Near Ground Potential.
- Low Current Drain 800 $\mu A$  Typ.
- Compatible with all Forms of Logic.
- Low Input Bias Current: 25nA Typ.
- Low Input Offset Current:  $\pm 5nA$  Typ.
- Low Offset Voltage:  $\pm 1mV$  Typ.

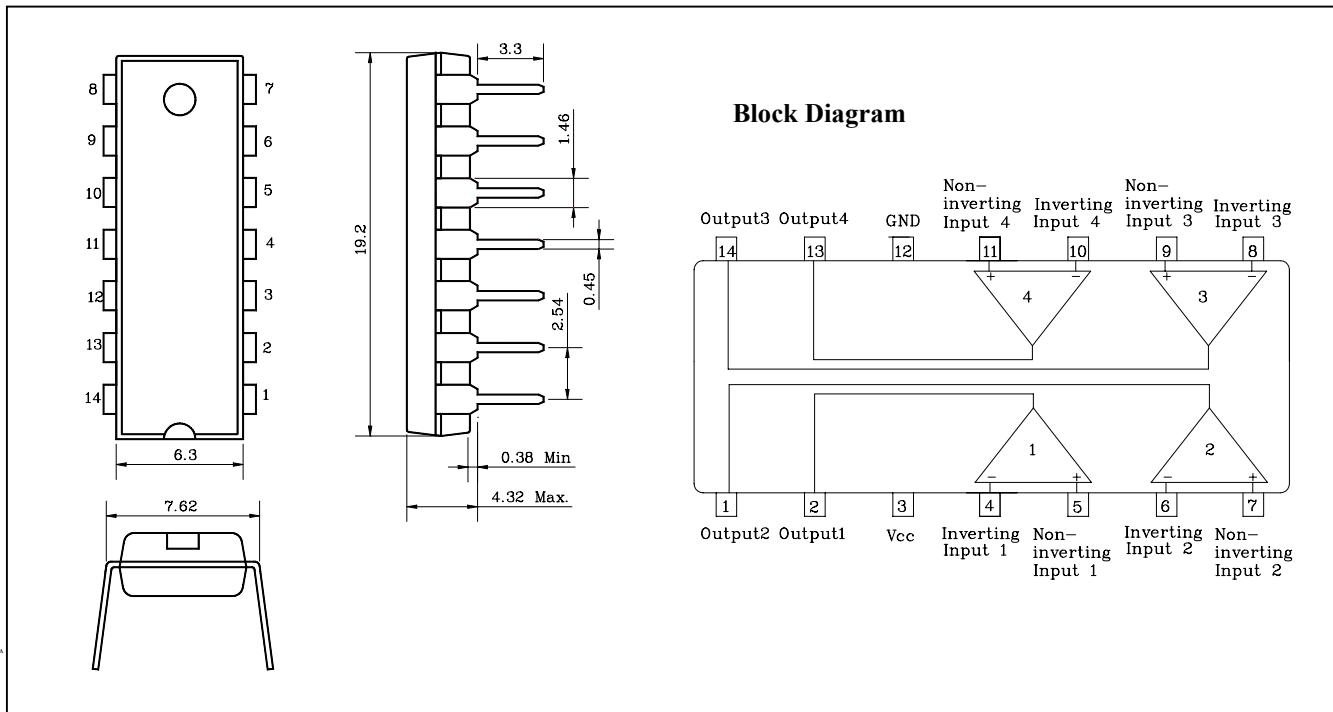
## Applications

- Transducer amplifier
- DC gain blocks
- Conventional operational amplifiers

## Ordering Information

Type NO.	Marking	Package Code
S339P	S339P	DIP-14

## Outline Dimensions

**unit : mm**


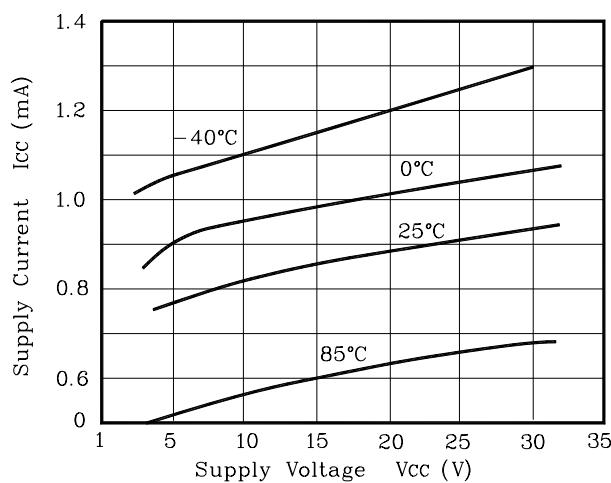
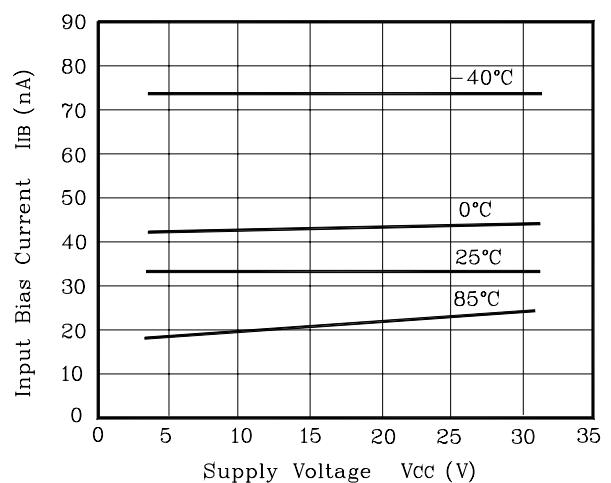
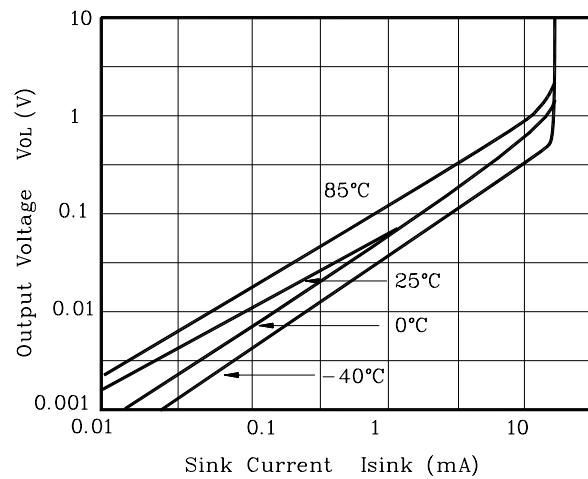
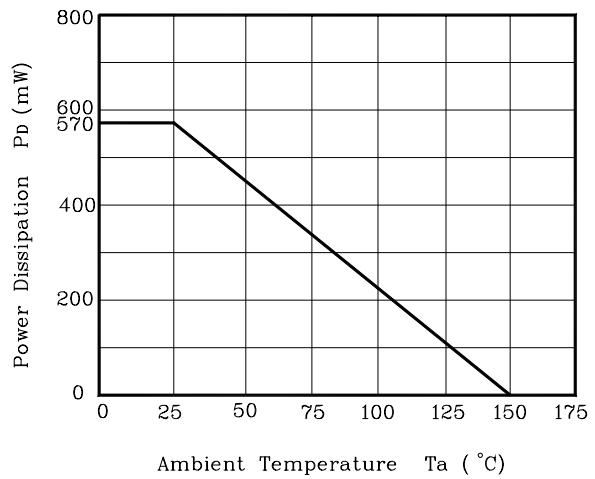
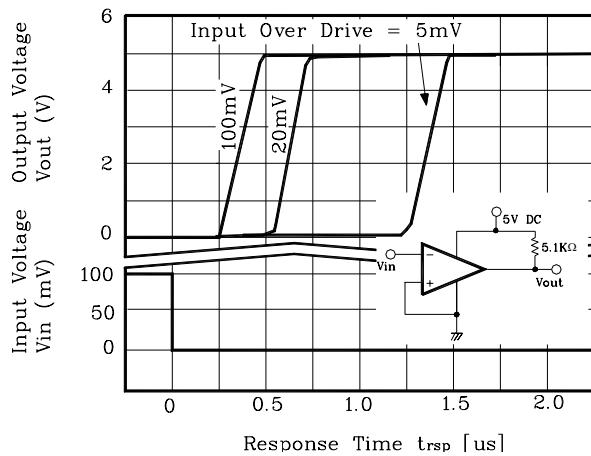
**Absolute maximum ratings**

Characteristic	Symbol	Ratings	Unit
Supply voltage	$V_{CC}$	36 or $\pm 18$	V
Differential input voltage	$V_{IND}$	36	V
Input voltage	$V_{IN}$	-0.3 ~ +36	V
Power Dissipation	$P_D$	570	mW
Operating temperature	$T_{opr}$	-40 ~ +85	°C
Storage temperature	$T_{stg}$	-65 ~ 150	°C

**Electrical Characteristics**(Unless otherwise specified.  $V_{CC} = 5V$  and  $-40^{\circ}\text{C} \leq Ta \leq +85^{\circ}\text{C}$ )

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Offset Voltage	$V_{IOS}$	$V_O = 1.4V, R_s = 0\Omega$	-	$\pm 2$	$\pm 5$	mV
Input Offset Current	$I_{IOS}$	-	-	$\pm 5$	$\pm 50$	nA
Input Bias Current	$I_{IB}$	-	-	25	250	nA
Input Common Mode Voltage Range	$V_{ICR}$	-	0	-	$V_{CC} - 1.5$	V
Supply Current	$I_{CC}$	$V_{CC} = 5V, R_L = \infty, \text{All Channel}$	-	0.8	2	mA
Large Signal Voltage Gain	$A_V$	$V_{CC} = 15V, R_L = 15\text{ k}\Omega$	-	200	-	V/mV
Output Voltage ('L' Level)	$V_{SAT}$	$V_{IN+} = 0V, V_{IN-} = 1V$ $I_{SINK} \leq 4\text{ mA}$	-	130	400	mV
Response Time	$t_{RES}$	$V_{RC} = 5V, R_L = 5.1\text{ k}\Omega$	-	1.3	-	uS
Output Sink Current	$I_{SINK}$	$V_O \leq 1.5V,$ $V_{IN+} = 0V, V_{IN-} = 1V$	6	16	-	mA
Output Leakage Current	$I_{Leak}$	$V_O = 5V$ $V_{IN+} = 1V, V_{IN-} = 0V$	-	0.1	-	nA

## Electrical Characteristic Curves

**Fig. 1**  $V_{CC}$ - $I_{CC}$ **Fig. 2**  $V_{CC}$ - $I_{IB}$ **Fig. 3**  $V_{OL}$ - $I_{SINK}$ **Fig. 4**  $P_D$ - $T_a$ **Fig. 5**  $V_{IN}, V_{OUT}$ - $t_{rsp}$ **Fig. 6**  $V_{IN}, V_{OUT}$ - $t_{rsp}$ 