


2N2646, 2N2647, GES2646, GES2647**Silicon Unijunction Transistors**

TO-92

TO-18

The GE/RCA 2N2646, GES2646 and 2N2647, GES2647 silicon-unijunction transistors have an entirely new structure resulting in lower saturation voltage, peak-point current and valley current as well as a much higher base-one peak pulse voltage. In addition, these devices are much faster switches.

The 2N2646 and GES2646 are intended for general purpose industrial applications where circuit economy is of primary importance, and is ideal for use in firing circuits for Silicon

Controlled Rectifiers and other applications where a guaranteed minimum pulse amplitude is required. The 2N2647 and GES2647 are intended for applications where a low emitter leakage current and a low peak point emitter current (trigger current) are required (i.e., long timing applications), and also for triggering high power SCRs. These types are supplied in JEDEC TO-18 package (2N2646, 2N2647) and in JEDEC TO-92 packages (GES2646, GES2647).

MAXIMUM RATINGS, Absolute-Maximum Values:

EMITTER REVERSE VOLTAGE	30 V
INTERBASE VOLTAGE	35 V
RMS EMITTER CURRENT50 mA
PEAK EMITTER CURRENT (Note 1)	2 A
POWER DISSIPATION (Note 2)	300 mW
OPERATING TEMPERATURE RANGE	-65° to +125°C
STORAGE TEMPERATURE RANGE	-65° to +150°C

**NOTES:**

1. Capacitor discharge — $10\mu F$ or less, 30 V or less.
2. Derate $3 \text{ mW}/^{\circ}\text{C}$ increase in ambient temperature. The total power dissipation (available power to Emitter and Base-Two) must be limited by the external circuitry.




Fig. 1—Unijunction transistor symbol and nomenclature used for current and voltage circuit.




Fig. 2—Typical base-1 peak-pulse voltage circuit.

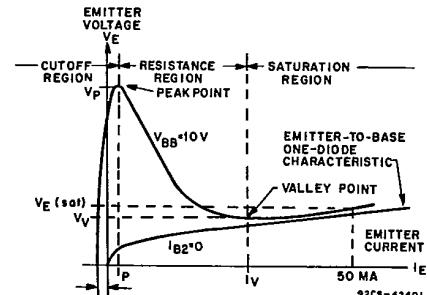


Fig. 3—Static emitter characteristics waveforms.

3875081 G E SOLID STATE

01E 18000 D

Unijunction Transistors and Switches

2N2646, 2N2647, GES2646, GES2647





T-37-21

ELECTRICAL CHARACTERISTICS, At Ambient Temperature (T_A) = 25°C Unless Otherwise Specified

CHARACTERISTICS	SYMBOL	LIMITS						UNITS	
		2N2646, GES2646			2N2647, GES2647				
		MIN.	TYP.	MAX.	MIN.	TYP.	MAX.		
Intrinsic Standoff Ratio ($V_{BB} = 10$ V)	η	0.56	0.69	0.75	0.68	0.77	0.82	—	
Interbase Resistance ($V_{BB} = 3$ V, $I_E = 0$)	R_{BB0}	4.7	6.7	9.1	4.7	6.7	9.1	kΩ	
Emitter Saturation Voltage ($V_{BB} = 10$ V, $I_E = 50$ mA)	$V_E(\text{sat})$	—	2	—	—	2	—	V	
Modulated Interbase Current ($V_{BB} = 10$ V, $I_E = 50$ mA)	$I_{B2(\text{mod})}$	—	24	—	—	27	—	mA	
Emitter Reverse Current ($V_{B2E} = 30$ V, $I_{B1} = 0$)	I_{EO}	—	0.001	12	—	0.001	0.2	μA	
Peak Point Emitter Current ($V_{BB} = 25$ V)	I_P	—	0.8	5	—	1	2	—	
Valley Point Current ($V_{BB} = 20$ V, $R_{B2} = 100\Omega$)	I_V	4	5	—	8	9	18	mA	
Base-One Peak Pulse Voltage (Note 1)(Fig. 2)	V_{OB1}	3	8.5	—	6	9.5	—	V	

NOTES:

1. The Base-1 peak pulse voltage is measured in the circuit below. This specification on the 2N2646 and 2N2647 is used to ensure a minimum pulse amplitude for applications in SCR firing circuits and other types of pulse circuits.
2. SCR firing conditions—see Figs. 19, 20, 21, and 22.

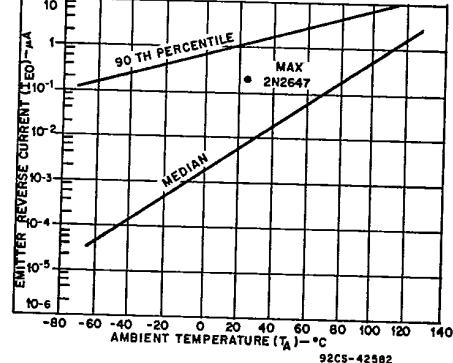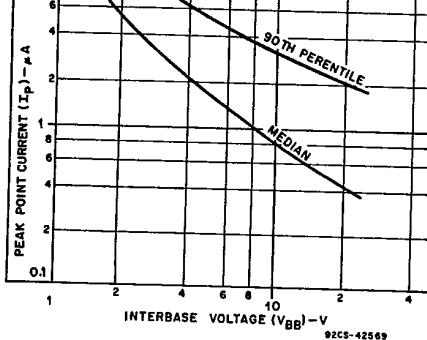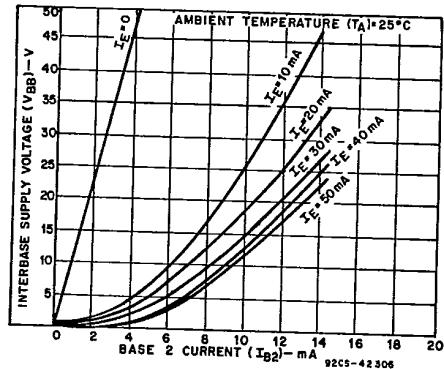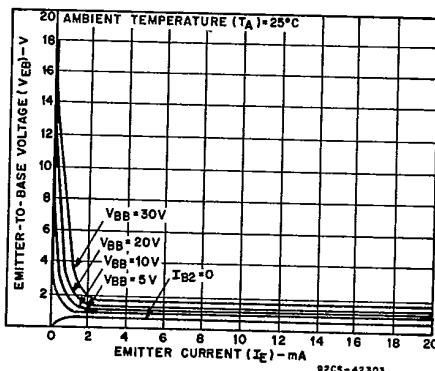

Unijunction Transistors and Switches

2N2646, 2N2647, GES2646, GES2647

T-37-21

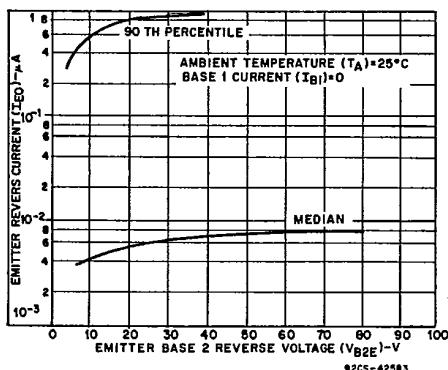


Fig. 8—Typical emitter reverse current characteristics.

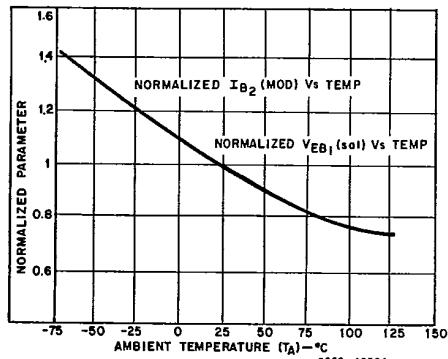


Fig. 9—Normalized base-2 current and base-1 saturation voltage characteristic.

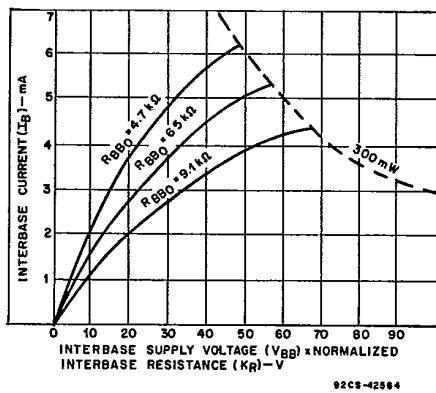


Fig. 10—Typical interbase characteristics.

Interbase characteristics at any junction temperature may be determined by dividing the horizontal scale by K_B , see Fig. 11.

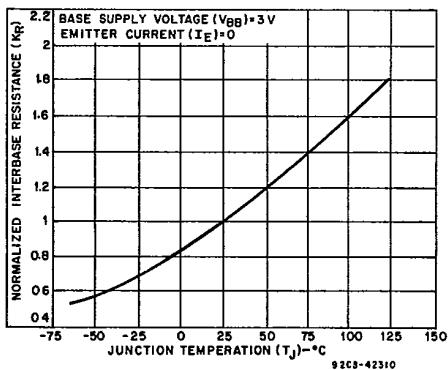


Fig. 11—Normalized interbase resistance characteristic.

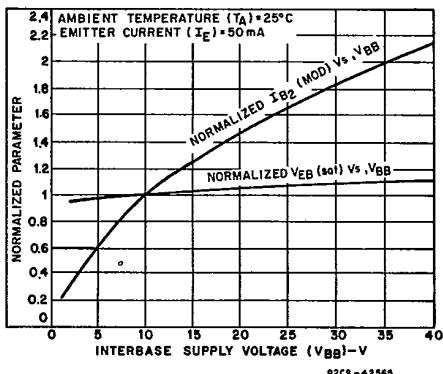


Fig. 12—Normalized base-2 current and base-1 saturation voltage characteristics.

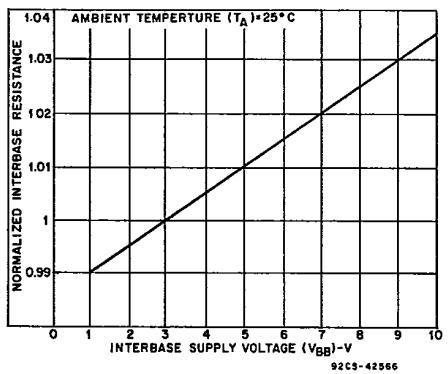







Fig. 13—Normalized interbase resistance characteristic.

3

Unijunction Transistors and Switches

2N2646, 2N2647, GES2646, GES2647

T-37-21

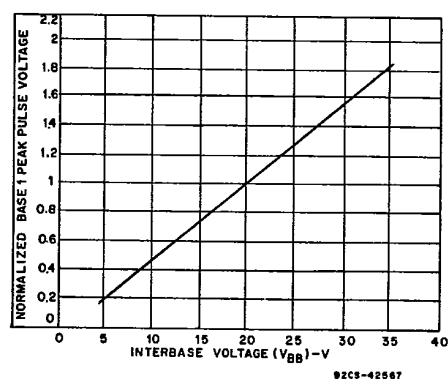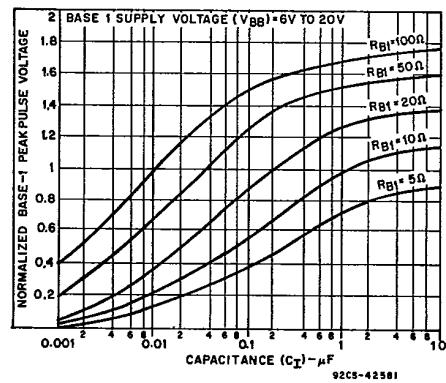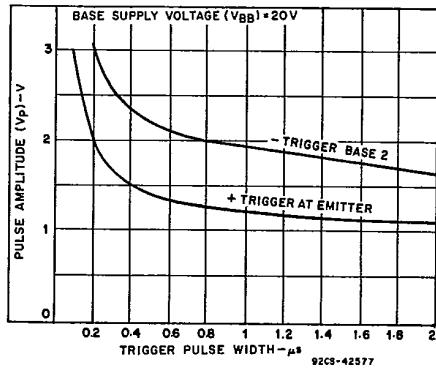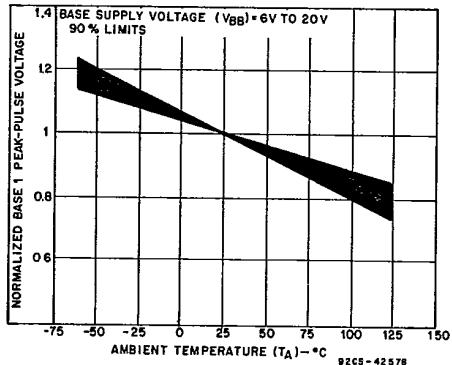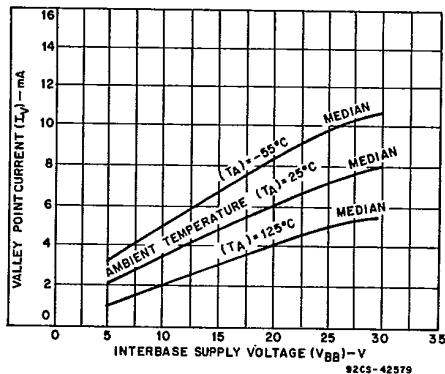

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.