


# GP Batteries


## Data Sheet

Model No.: GP250AAHC


Type	: Rechargeable Nickel Metal Hydride Cylindrical Cell
Nominal Dimension (with Sleeve)	: $\Phi = 14.5\text{mm}$ H = 50.5mm
Applications	: Recommended discharge current 240 to 7200mA
Nominal Voltage	: 1.2V
Capacity	: Minimum: 2400mAh Typical: 2450mAh when discharged at 480mA to 1.0V at 20°C
Charging Condition	: 240mA for 16 hrs at 20°C
Fast Charge	: 1200mA to 2400mA (0.5 to 1C) charge termination control recommended control parameters: - $\Delta V$ : 0 - 5mV DT/dt : 0.8°C/min (0.5 to 0.9C) : 0.8 - 1°C/min (1C) TCO : 45 - 50°C Timer : 100% nominal input (for ref. only)
Service Life	: >500 cycles (IEC standard)
Continuous Overcharge	: 240mA maximum current for 1 year No conspicuous deformation and/or leakage
Weight	: 31.0g
Internal Resistance	: Average 18m $\Omega$ upon fully charged (Range 14-28m $\Omega$ ) at 1000Hz
Max. Charging Voltage	: 1.5V at 250mA charging
Ambient Temperature Range	Standard Charging : 0 to 45°C Fast Charging : 10 to 45°C Discharging : -20 to 50°C Storage : -20 to 35°C

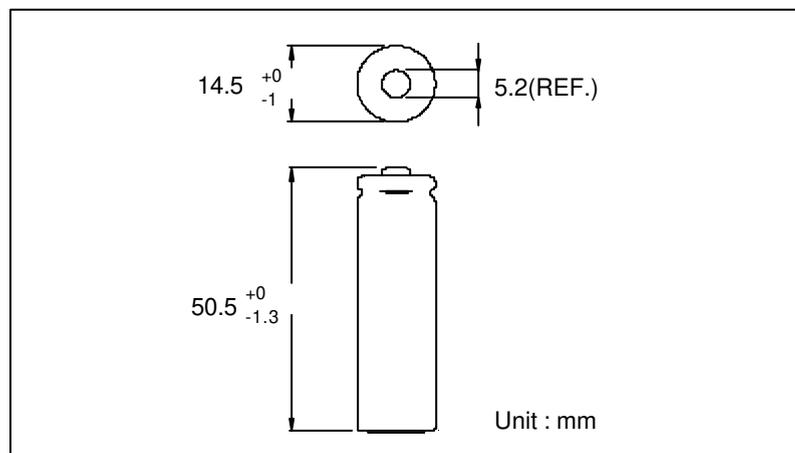


### Fast Charge (Charge control required)

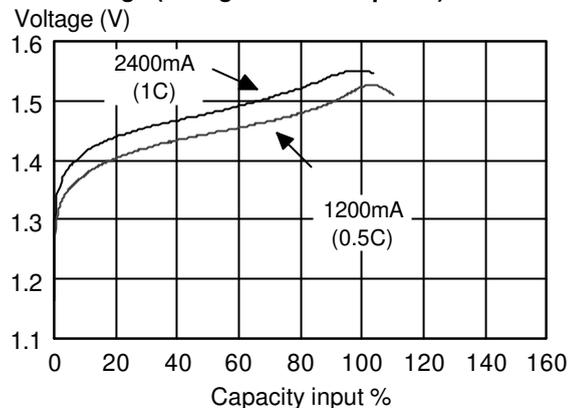

### Low Rate Discharge

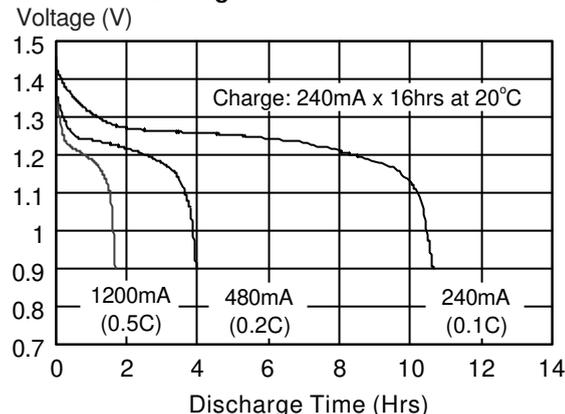

### High Rate Discharge

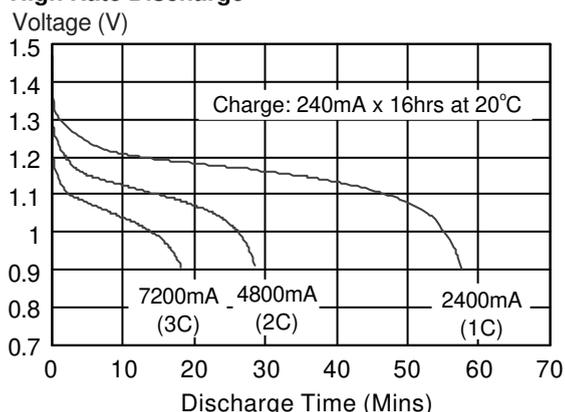

\* The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.