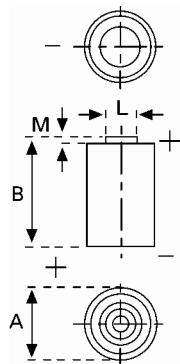


**Data Sheet**


<b>Type Number .....</b>	6206	
<b>Designation IEC .....</b>	CR 15H270	
<b>System .....</b>	Li-Manganese dioxide / Organic Electrolyte	
<b>UL Recognition:.....</b>	MH 13654 (N)	
<b>Nominal Voltage .....</b>	3 V	
<b>Typical Capacity C .....</b>	850 mAh Current 20 mA, at 20°C down to 1,8 V	
<b>Weight (approx.) .....</b>	11 g	
<b>Volume .....</b>	5,2 ccm	
<b>Temperature Ranges</b>	min	max.
Storage .....	-20°C	45°C
Discharge .....	-20°C	60°C
<b>Dimensions</b>	min	max.
Diameter (A) .....	15,1	15,6
Height (B) .....	26,3	27,0
Shoulder Diameter[L].....	6,2	6,4
Shoulder Height [M].....	0,7	1,3
<b>Segment .....</b>	Electronic	
<b>Main Applications .....</b>	Photo Electronic Devices	

**Typical Capacities (at 20°C)**

Discharge Type	Discharge Current	End Voltage: 1,8 V	
Continuous 24h/d,7d/w	20 mA	Capacity [mAh]: 850	

All Data contained herein is for single cells

For battery applications, performance data may vary from single cell data, depending on specific battery configuration