

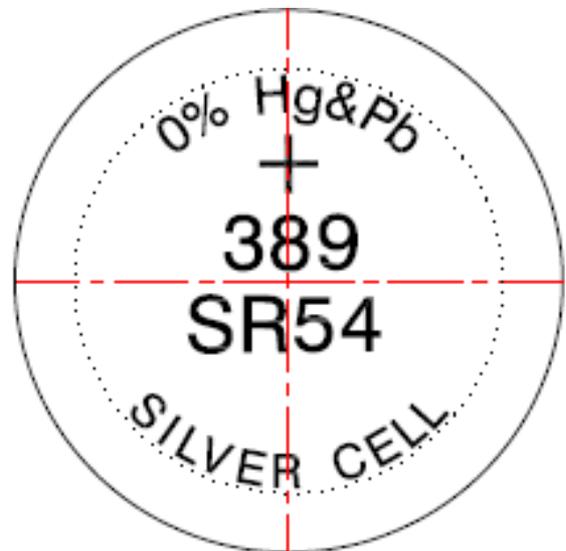


Model No.: **GP389F**

Typical Discharge curve at  $20 \pm 3^\circ\text{C}$

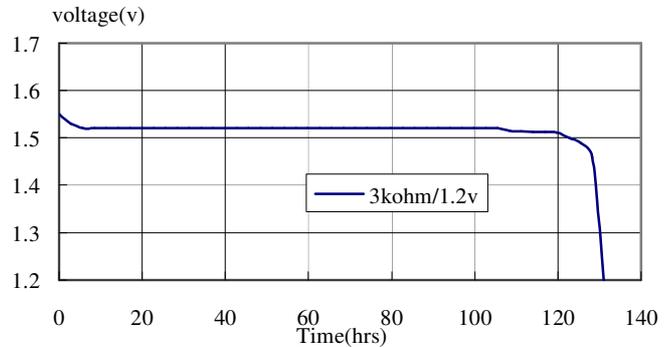

<b>Description</b>	: Mercury and Lead Free Alkaline Battery
<b>Chemical System</b>	: Zinc/Silver Oxide
<b>Nominal Voltage</b>	: 1.55V
<b>Nominal Dimension</b>	: $\Phi 11.60\text{mm} \times 3.05\text{mm}$
<b>Applications</b>	: Analog watch
<b>Average Weight</b>	: 1.10 g
<b>Shelf Life</b>	: Not less than 90% of the service capacity within first year, Not less than 85% of the service capacity within second year storage at $20 \pm 2^\circ\text{C}$ Max 85 %RH.
<b>Date Code</b>	: Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.
<b>Close Circuit Voltage</b>	: 1.30 V (min.) (load resistor $200\Omega$ at $20 \pm 2^\circ\text{C}$ for 0.1 to 2 seconds)
<b>Nominal Service Life</b>	: 130hrs (load $3\text{ k}\Omega$ to cut off 1.2V under $20 \pm 2^\circ\text{C}$ )
<b>Average Service Capacity</b>	: 70mAh (load $3\text{ k}\Omega$ to cut off 1.2V under $20 \pm 2^\circ\text{C}$ )

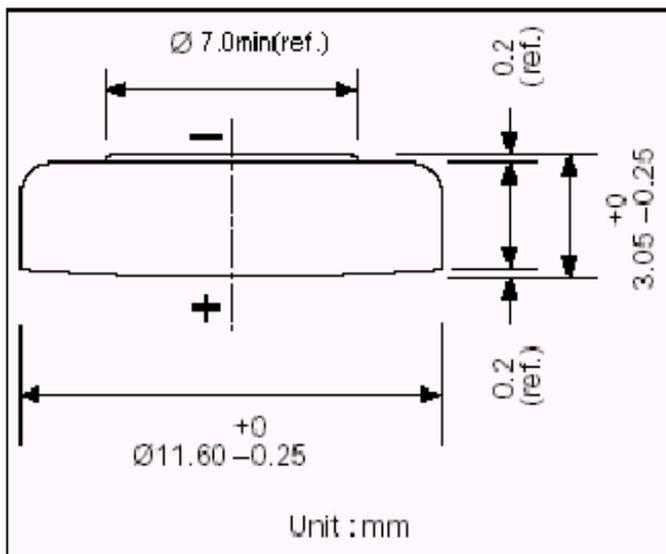

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.