



|  |   |
|--|---|
| <b>Type</b>                            | : Rechargeable Nickel Metal Hydride Cylindrical Cell  |
| <b>Nominal Dimension (with Sleeve)</b> | : $\Phi = 14.5\text{mm}$<br>H = 50.5mm  |
| <b>Applications</b>                    | : Recommended discharge current<br>200 to 6000mA  |
| <b>Nominal Voltage</b>                 | : 1.2V  |
| <b>Capacity</b>                        | : Nominal: 2000mAh<br>Minimum: 2000mAh<br>Typical: 2050mAh<br>When discharged at 400mA to 1.0V at 20°C  |
| <b>Charge Retention</b>                | : 80% of nominal capacity after cell storage at 20°C for 24months<br>When discharged at 400mA to 1.0V at 20°C   |
| <b>Charging Condition</b>              | : 200mA for 16 hrs at 20°C  |
| <b>Fast Charge</b>                     | : 1000mA to 2000mA (0.5 to 1C)<br>charge termination control recommended<br>control parameters:<br>- $\Delta V$ : 0-5mV<br>DT/dt : 0.8°C/min (0.5 to 0.9C)<br>0.8 - 1°C/min (1C)<br>TCO : 45 - 50°C<br>Timer : 105% nominal input (for ref. only) |
| <b>Service Life</b>                    | : ~1000 cycles (IEC standard)   |
| <b>Continuous Overcharge</b>           | : 200mA maximum current for 1 year.<br>No conspicuous deformation and/or leakage  |
| <b>Weight</b>                          | : 30.0g   |
| <b>Internal Resistance</b>             | : Average 21m $\Omega$ upon fully charged<br>(Range 18 - 28m $\Omega$ ) at 1000Hz   |
| <b>Max. Charging Voltage</b>           | : 1.5V at 200mA charging  |
| <b>Ambient Temperature Range</b>       | : Standard Charge : 0 to 45°C<br>Fast Charging : 10 to 45°C<br>Discharge : -20 to 50°C<br>Storage : -20 to 30°C   |


### Model No.: GP210AAHCB

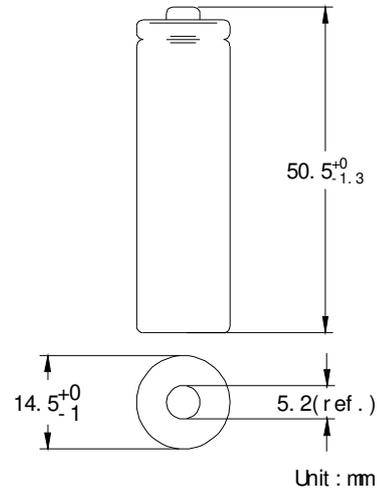


#### Low Rate Discharge

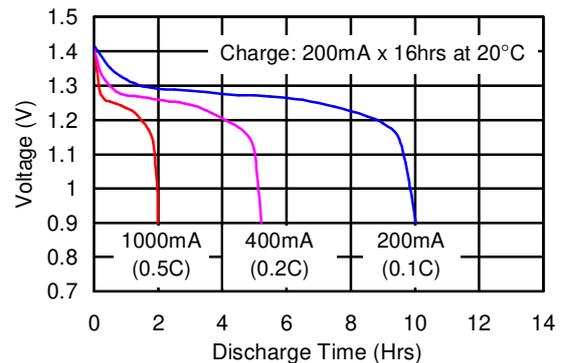

#### Fast Charge (Charge Control Required)

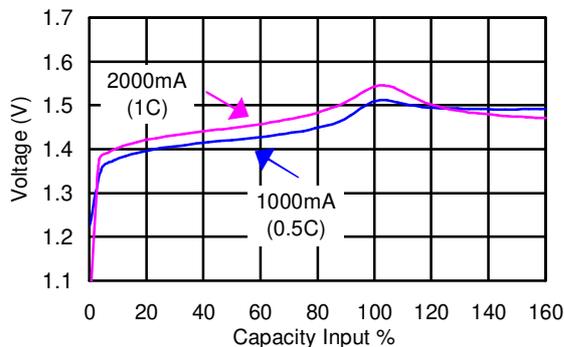

#### High Rate Discharge

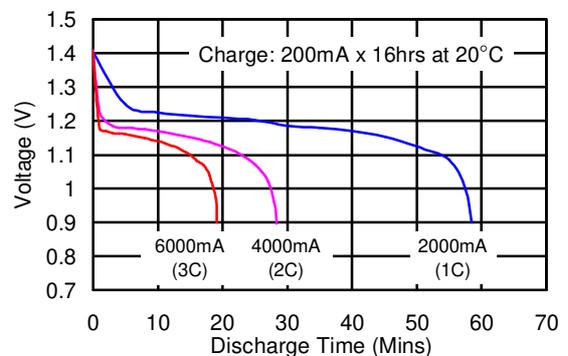

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.