

SPEC NO.: -181119

Specification

TO:STE

Model Name: Ceramic Filter

PART NO: LT455HTW

CUSTOMER PART NO.:

Approval sheet:


Approved	Yes
	No.
Customer's comments are welcomed here.	
Pls return this copy as a certificate of your approval by Email.	
Approved By _____	Date: _____

STRONG ELECTRONICS&TECHNOLOGY LIMITED
Service Hotline:86-755-84528985 Fax: 86-755-84528986
Email:info@strongfirst.com.cn
www.strongfirst.com.cn

SPECIFICATION OF CERAMIC FILTER

LT455HTW

1. THIS SPECIFICATION SHALL COVER THE CHARACTERISTICS OF CERAMIC FILTER WITH 455KHz, INTENDED FOR USE IN TRANSCEIVERS, ETC.
 2. PART NUMBER : LT455HTW
 3. ELECTRICAL SPECIFICATIONS
 - A. CENTRE FREQUENCY (f_0) : 455KHz \pm 1.0KHz. MAX.
 - B. BAND WIDTH AT 6 dB : \pm 3 KHz MIN. (TO 455KHz)
 - C. BAND WIDTH AT 50 dB : \pm 9 KHz MAX. (TO 455KHz)
 - D. STOP BAND ATTENUATION : 60 dB MIN. (AT $f_0 \pm$ 100KHz)
 - E. RIPPLE : 2.0dB MAX. (AT $f_0 \pm$ 1.0KHz)
 - F. INSERTION LOSS : 6.0 dB MAX (AT THE SMALLEST LOSS)
 - G. TEMPERATURE COEFFICIENT OF CENTER FREQUENCY : \pm 50PPM/ $^{\circ}$ C Max. (-20 TO +80 $^{\circ}$ C)
 - H. INPUT/OUTPUT IMPEDANCE : 2K Ω
- NOTE : A) CENTER FREQUENCY SHALL BE DEFINED AS THE CENTRAL VALUE OF THE BAND WITH AT 6 dB
- B) TEMPERATURE COEFFICIENT OF CENTER FREQUENCY SHALL BE DEFINED AS THE AVERAGE OF THE CENTRAL FREQUENCY.
4. MEASUREMENT
 - A. ENVIRONMENTAL CONDITION
MEASUREMENT SHALL BE CARRIED OUT AT THE REFERENCE TEMPERATURE OF 25 $^{\circ}$ C \pm 2 $^{\circ}$ C. IT SHALL BE POSSIBLY DONE AT 5 $^{\circ}$ C TO 35 $^{\circ}$ C UNLESS IT IS QUESTIONABLE.
 - B. MEASURING CIRCUIT

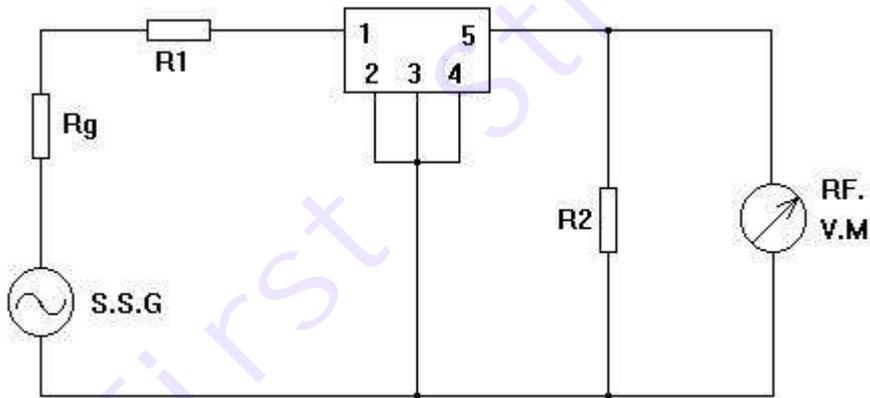

$R_g + R_1 = R_2 = \text{Input/Output Impedance}$




#S.S.G. (STANDARD SIGNAL GENERATION)

R.F.V.M. (RADIO FREQUENCY VOLTAGE METER)

$R_g + R_1 = R_2 = 1.5K \Omega$

$C \leq 50 \text{ PF}$

5. DIMENSIONS(mm)

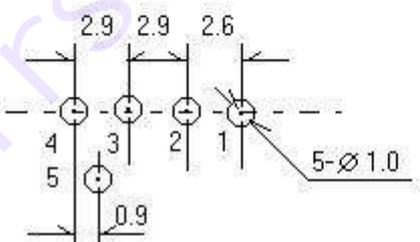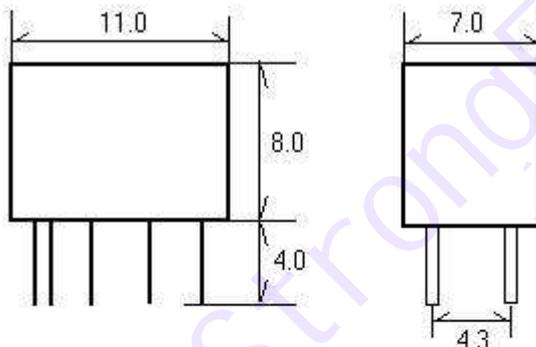

- 1. INPUT
- 2.3.4 GROUND
- 5. OUTPUT

6. ENVIRONMENTAL CHARACTERISTICS

6-1 HIGH TEMPERATURE EXPOSURE

SUBJECT THE FILTER TO $+80^{\circ}\text{C}$ FOR 96 HOURS. THEN RELEASE THE FILTER INTO THE SPECIFICATIONS IN TABLE

6-2 MOISURE

KEEP THE FILTER AT 40°C AND 95% RH FOR 96 HOURS. THEN RELEASE THE FILTER INTO THE ROOM CONDITIONS FOR 1 TO 2 HOURS PRIOR TO THE MEASUREMENT. IT SHALL FULFILL THE SPECIFICATIONS IN TABLE 1.

6-3 LOW TEMPERATURE EXPOSURE

SUBJECT THE FILTER TO -20°C FOR 96 HOURS. THEN RELEASE THE FILTER INTO THE ROOM CONDITIONS FOR 1 TO 2 HOURS PRIOR TO THE MEASUREMENT. IT SHALL FULFILL THE SPECIFICATIONS IN TABLE 1.

6-4 TEMPERATURE CYCLING

SUBJECT THE FILTER TO A LOW TEMPERATURE OF -55°C FOR 30 MINUTES. FOLLOWSING BY A HIGH TEMPERATURE OF +85°C FOR 30 MINUTES. THEN RELEASE THE FILTER INTO THE ROOM CONDITIONS FOR 1 TO 2 HOURS PRIOR TO THE MESUREMENT. IT SHALL MEET THE SPECIFICATIONS IN TABLE 1.

6-5 RESISTANCE TO SOLDER HEAT

DIP THE FILTER TERMINALS NO CLOSER THAN 1.5mm INTO THE SOLDER BATH AT 270°C \pm 10°C FOR 10 \pm 1 SEC. THEN RELEASE THE FILTER INTO THE ROOM CONDITIONS FOR 1 TO 2 HOURS. THE FILTER SHALL MEET THE SPECIFICATIONS IN TABLE 1.

6-6 MECHANICAL SHOCK

DROP THE FILTER RANDOMLY ONTO THE CONCRETE FLOOR FROM THE HEIGHT OF 30cm 3 TIMES. THE FILTER SHALL FULFILL THE SPECIFICATIONS IN TABLE 1.

6-7 VIBRATION

SUBJECT THE FILTER TO THE VIBRATION FOR 1 HOUR EACH IN X,Y AND Z AXES WITH THE AMPLITUDE OF 1.5 mm AT 10 TO 55 Hz. THE FILTER SHALL FULFILL THE SPECIFICATIONS IN TABLE 1.

6-8 LEAD FATIGUE**6-8-1 PULLING TEST**

WEIGHT ALONG WITH THE DIRECTION OF LEAD WITHOUT AN SHOCK 3 KG. THE FILTER SHALL SATISFY ALL THE INITIAL CHARACTERISTICS.

6-8-2 BENDING TEST

LEAD SHALL BE SUBJECT TO WITHSTAND AGAINST 90°C BENDING IN THE DIRECTION OF THICKNESS. THIS OPERATION SHALL BE DONE TOWARD BOTH DIRECTION. THE FILTER SHALL SHOW NO EVIDENCE OF DAMAGE AND SHALL SATISFY ALL THE INITIAL ELECTRICAL CHARACTERISTICS.

TABLE 1

ITEM	SPECIFICATION
CENTRE FREQUENCY(f_0)	455±1.0 KHz Max
BAND WIDTH(6 dB)	±3 KHz Min
SELECTIVITY(50dB)	±9 KHz Max
STOP BAND ATTENUATION	60 dB Min
RIPPLE	2.0 dB Max
INSERTION LOSS	6.0 dB Max

© Copyright 2017 StrongFirst. All Rights Reserved.