

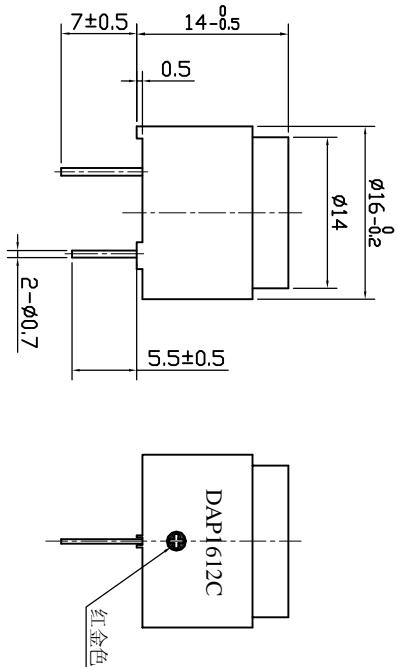


SPECIFICATION

- 1.Rated Voltage 12V
 2.Operating Voltage 6~18V
 3.Max.Rated Current 40mA
 4.Coil Resistance 115±12Ω
 5.Coil Impedance 200Ω
 6.Min.Sound Pressure Level 85dB/10cm
 7.Resonant Frequency 2048Hz
 8.Case Material MPP0
 9.Operating Temperature -30~+80°C
 10.Store Temperature -40~+85°C
 11.Weight 7g



1 2 3 4 5 6 7 8

KEPO NINGBO KEO ELECTRONIC CO.,LTD			
http://www.chinacoustic.com			
Magnetic Buzzer QUARTZ			
No.	DESCRIPTION	APPROVED	DATE
	NOTED OTHERWISE X = XX = YY = 90° FORMED 1/2" 90° ANGLES 1/2"	DRAWN	DAP1612C
FIRST ANGLE PROJECTION	CHECKED	UNIT mm	ENG NO. OEM1859
	APPROVED	05.12.02	SCALE NOT TO SCALE SHEET VER 1.0

A	B	C	D	E	F