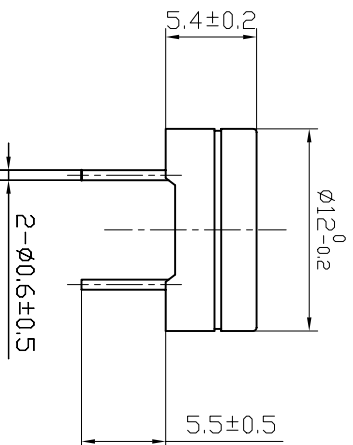



Specifications

- | | |
|-----------------------------------|-----------------------------|
| 1. Rated Voltage..... | 1.5V |
| 2. Operating Voltage..... | 1-3V |
| 3. Max. Rated Current..... | 40mA |
| 4. Coil Resistance..... | 16 $\pm$ 4 Ω |
| 5. Coil Impedance | 40 Ω |
| 6. Min. Sound Pressure Level..... | 75dB/10cm |
| 7. Resonant Frequency..... | 2048Hz |
| 8. Case Material..... | NORYL |
| 9. Operating Temperature..... | -20 $\sim$ +70 $^{\circ}$ C |
| 10. Store Temperature..... | -30 $\sim$ +80 $^{\circ}$ C |
| 11. Weight..... | 2g |

				NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com					
				KP12-105A					
No.	DESCRIPTION	APPROVED	DATE						
1. ALL DIMENSIONS IN MILLIMETERS 2. UNLESS OTHERWISE NOTED OTHERWISE		APPROVALS	DATE						
X ± XX ± XXX ± 90° TOLERANCE ±°									
DRAWN									
CHECKED									
FIRST ANGLE PROJECTION		APPROVED		03.07.22	SCALE	NOT TO SCALE	SHEET	VER	1.0
					mm		KP3.840.709		