

SPECIFICATION

Customer : 上海毅仁

Applied To :

Product Name : Receiver

Model Name : KP1506RS1

Drawing No. : KFC2192

Signature of Appronal

--

Signature of KEPO

Approved by	Checkde by	Issued by	Date



Ningbo Kepo Electronics Co.,Ltd.

Address: No.25 Baoyuan Road Dongqian Lake Industrial Area, Dongqian Lake Ningbo 315121, China

Tel: +86(574)88371186, 88370330 Fax: +86(574)88370329

<http://www.chinaacoustic.com> E-mail: Sales@kepo.com.cn

Specification for Receiver	Page	2/9
	Revision No.	1.2
Model No. : KP1506RS1	Drawing No.	KFC2192

CONTENTS

1. Scope
2. General
3. Electrical and Acoustic Characteristics.
4. Reliability Test
5. Measurement Block Diagram & Response curve
6. Structure
7. Dimensions
8. Packing
9. Revision

Specification for Receiver	Page	3/9
	Revision No.	1.2
	Drawing No.	KFC2192
Model No. : KP1506RS1		

1. Scope

This specification is applied to the dynamic speaker which is used all of the electrical acoustic product.

- compact, rich sound
- applications: mobile phone, PDA, notebook computer, etc. ..

2. General

- 2.1 Out-Diameter : 15x6 mm
- 2.2 Height : 2.7 mm
- 2.3 Weight : 0.5 g
- 2.4 Operating Temperature range:
-40~+70℃ without loss of function
- 2.5 Store Temperature range:
-40~+85℃ without loss of function

3. Electrical and Acoustic Characteristics.

Test condition : 15 ~ 35 ℃, 25% ~ 85% RH, 860~1060 mbar

No	Items	Specification
1	Impedance	32 Ω ± 15% (1Vrms at 1KHz)
2	Sound Pressure Level	114 dB ± 3dB (179mV at 1kHz)
3	Resonance Frequency	
4	Frequency Range	300 ~ 3400 Hz
5	Input Power	Rated 0.03 W / Max. 0.05 W
6	Distortion	<10% Max. at 2kHz/2Vrms
7	Buss and Rattle	Should not be audible buzzes,rattles when the 0.98V sine wave signal swept at frequency range.
8	Polarity	When supplied plus D.C. voltage to (+) terminal, the cone diaphragm must move to forward.

Specification for Receiver

Page

4/9

Model No. : KP1506RS1

Revision No.

1.2

Drawing No.

KFC2192

4. Reliability Test



After test(1~7item), the speaker S.P.L . difference shall be within $\pm 3\text{dB}$, and the appearance not exist any change to be harmful to normal operation (e.g. cracks,rusts,damages and especially distortion).

No	Items	Specification
1	High Temperature Test	After being placed in a chamber with $+85\pm 3\text{ }^{\circ}\text{C}$ for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.
2	Low Temperature Test	After being placed in a chamber with $-40\pm 3\text{ }^{\circ}\text{C}$ for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.
3	Humidity Test	After being placed in a chamber with 85 to 90%R.H. at $+40\pm 2\text{ }^{\circ}\text{C}$ for hours and then being placed in natural condition for 1 hour, speaker shall be measured.
4	Thermal Shock Test	<p>After being placed in a chamber at $+70^{\circ}\text{C}$ for 1 hour, then speaker shall be placed in a chamber at -40°C for 1 hour(1 cycle is the below diagram). After 25 above cycles, speaker shall be measured after being placed in natural condition for 1 hour.</p> <div style="text-align: center;"> <p>The diagram illustrates a thermal shock cycle. It starts with a horizontal line at $+70^{\circ}\text{C}$. A vertical line indicates the start of a ramp down to -40°C. A green line segment shows the ramp, labeled "20 Sec.". Below the ramp, a horizontal line at -40°C is labeled "1 hour". This is followed by another horizontal line at $+70^{\circ}\text{C}$ labeled "1 hour".</p> </div>
5	Vibration Test	After being applied vibration of amplitude of 1.5mm with 10 to 55Hz band of vibration frequency to each of 3 perpendicular directions for 1 hour, then placed in natural condition for 1 hour, speaker shall be measured.

6	Drop Test	The speaker when mounted in the jig which weight 85g~100g, shall with stand 15 times random drops from a height of 1.5 meter to a concrete floor faced with 5mm thick hard wood board.and be nothing mechanical damage.
7	Load test	After being applied loading white noise with input power 0.03W(0.98Vrms.) for 96 hours, then placed in natural condition for 1 hour, speaker shall be measured.
8	Insulation test	When they are measured with DC 100V the insulation resistance between v.c. terminal and frame must be more than 1 MΩ

Specification for Receiver		Page	5/9
Model No. : KP1506RS1		Revision No.	1.2
		Drawing No.	KFC2192

5. Measurement Block Diagram & Response curve

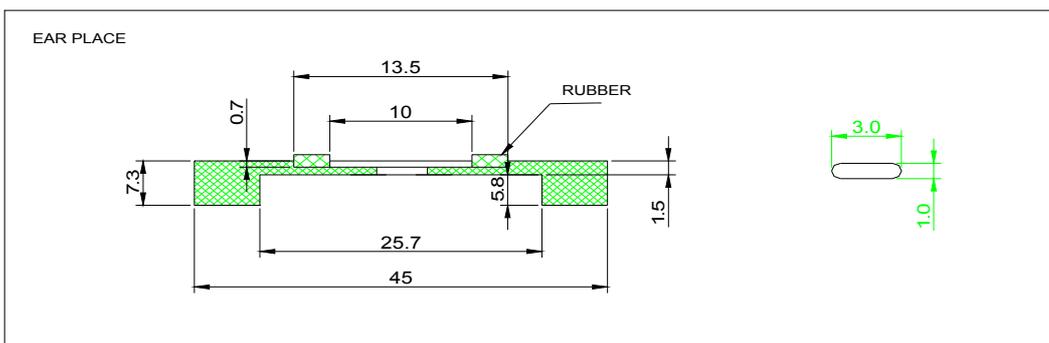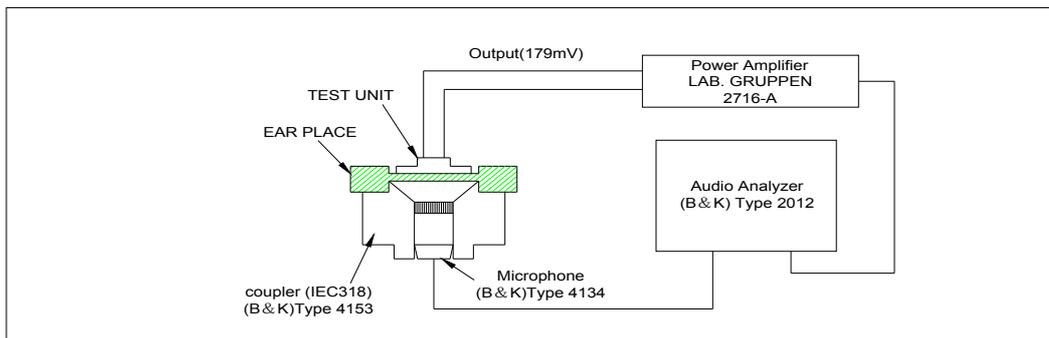

产品型号:156100176000

产品编号:0000


1kHz灵敏度 : 113.6 dB

平均灵敏度 : 100.8 dB

阻抗 : 33.1Ω

F0 : 0000 Hz



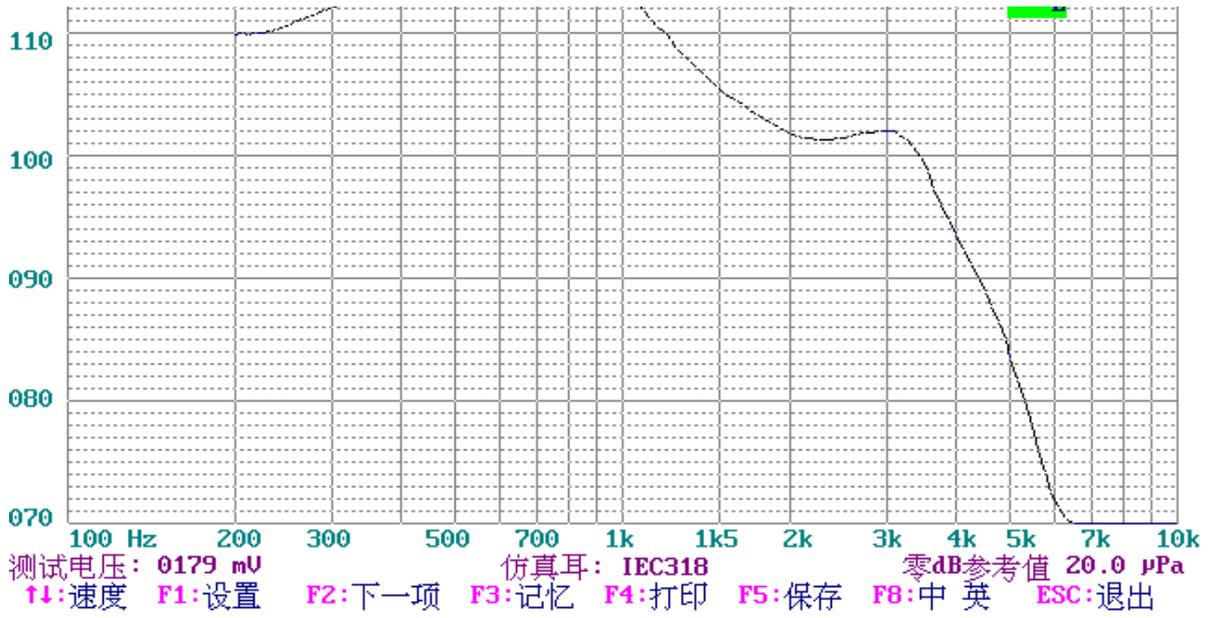

Specification for Receiver


Page 6/9

Revision No. 1.2

Model No. : KP1506RS1

Drawing No. KFC2192



6. Structure

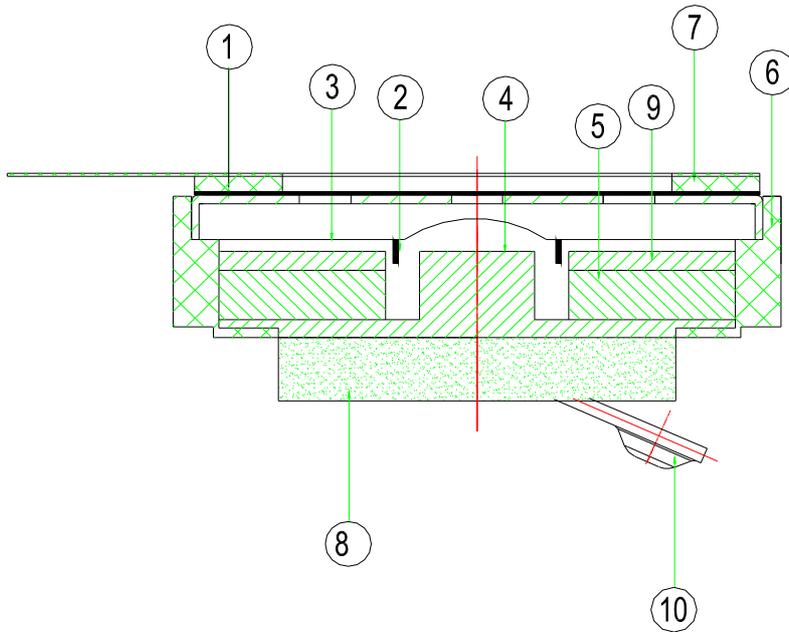


12				
11				
10	Spring	1	SUS304	
9	Plate	1	SPC	
8	Cushion	1	unwoven fabric	800+PSR0.5
7	Gasket	1	unwoven fabric	800+2B+800
6	Frame	1	PBT	
5	Magnet	1	Nd-Fe-B	
4	Yoke	1	SPC	
3	Diaphragm	1	PEI	
2	Voice Coil	1	Copper	
1	Cap	1	SUS304	
No.	Part Name	Q'ty	Material	Remarks

Specification for Receiver		Page	7/9
		Revision No.	1.2
Model No. : KP1506RS1		Drawing No.	KFC2192

7. Dimensions

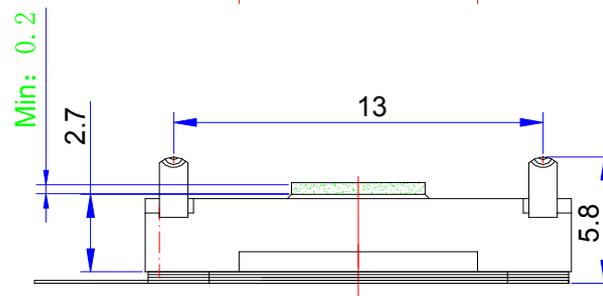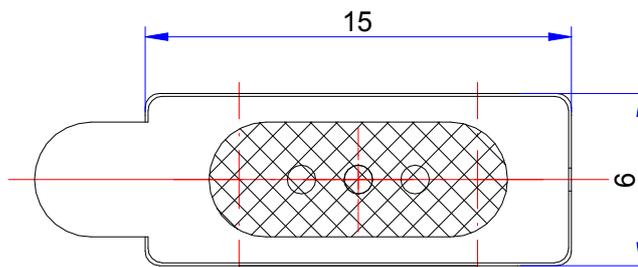

2-5.8± 1.0(FREE POSITION)

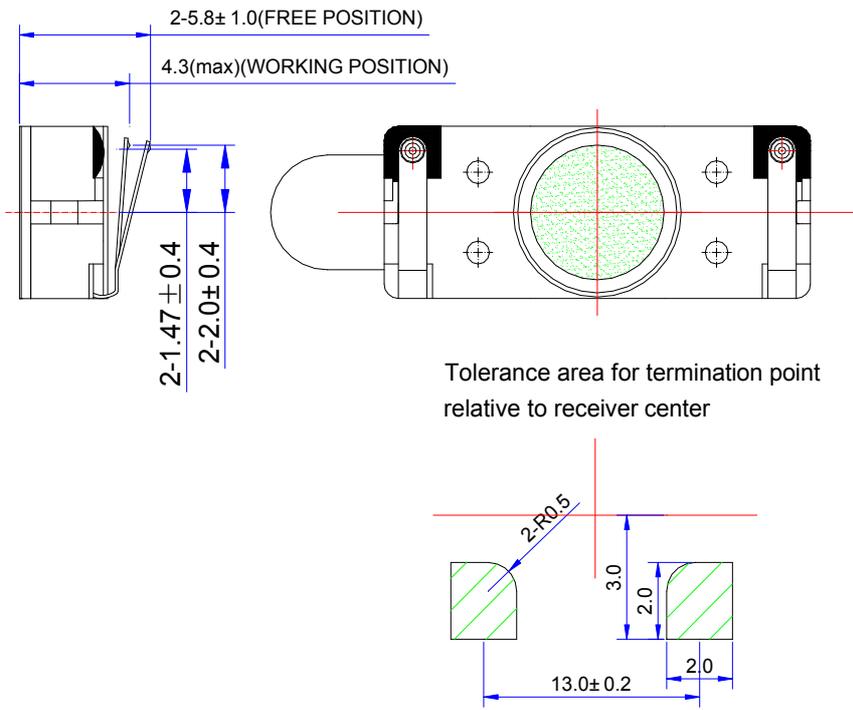

FIRST ANGLE PROJECTION



UNIT : mm

Tolerance : ±0.2

Specification for Receiver

Page

8/9

Revision No.


1.2

Model No. : KP1506RS1



Drawing No.

KFC2192

8. Packing

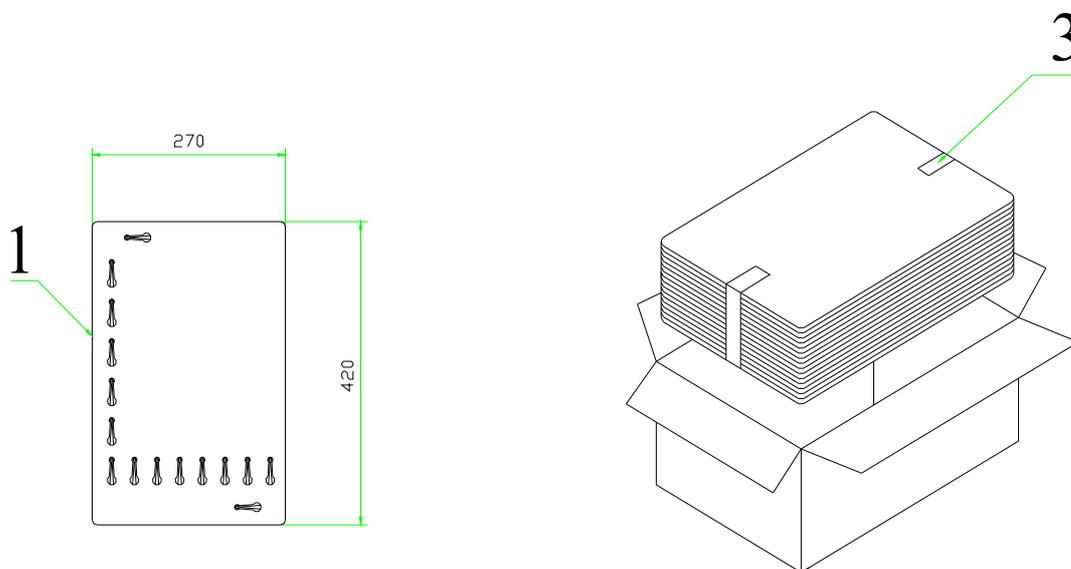

100Pcs

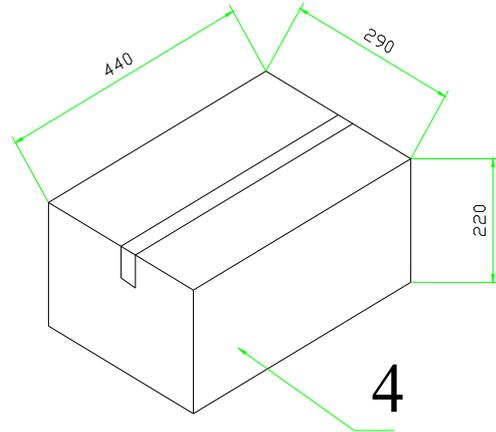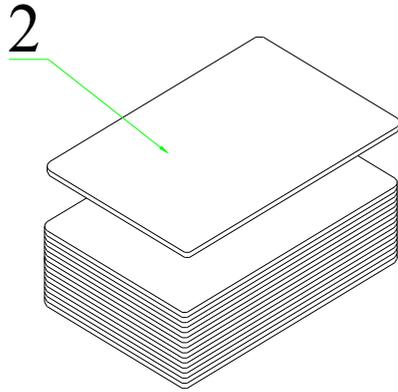

QTY: 2000Pcs
440 x290 x220

Specification for Receiver		Page	9/9
		Revision No.	1.2
Model No. : KP1506RS1		Drawing No.	KFC2192

9. Revision

Rev. No.	DATE	PAGE	DESCRIPTION	BOM
1.0	2007.02.28		Primary	
1.1	2007.03.15		Shrapnel change	
1.2	2007.04.10		Thermal Shock Test change	

