

Specification for Receiver	Page	2/10
	Revision No.	1.1
Model No. : KP2853R1H-DYSS	Drawing No.	KFC2282

CONTENTS

1. Scope
2. General
3. Electrical and Acoustic Characteristics.
4. Reliability Test
5. Measurement Block Diagram & Response curve
6. Structure
7. Dimensions
8. Packing
9. Revision

Specification for Receiver

Page

3/10

Revision No.

1.1

Model No. : KP2853R1H-DYSS

Drawing No.

KFC2282

1. Scope

This specification is applied to the dynamic speaker which is used all of the electrical acoustic product.

-- compact, rich sound

-- applications: mobile phone, PDA, notebook computer, etc. ..

2. General

2.1 Out-Diameter : 28 mm

2.2 Height : 7.2 mm

2.3 Weight : 4.5 g

2.4 Operating Temperature range:

-20~+60℃ without loss of function

2.5 Store Temperature range:

-30~+70℃ without loss of function

3. Electrical and Acoustic Characteristics.

Test condition : 15 ~ 35 ℃, 25% ~ 85% RH, 860~1060 mbar

No	Items	Specification
1	Impedance	150 Ω ± 15% (1Vrms at 1KHz)
2	Sound Pressure Level	106 dB ± 3dB (100mV at 1kHz)
3	Resonance Frequency	
4	Frequency Range	300 ~ 3400 Hz
5	Input Power	Rated 0.01 W / Max. 0.05 W
6	Distortion	<10% Max. at 2kHz/2Vrms
7	Buss and Rattle	Should not be audible buzzes,rattles when the 1.22V sine wave signal swept at frequency range.
8	Polarity	When supplied plus D.C. voltage to (+) terminal, the cone diaphragm must move to forward.

Specification for Receiver

Page

4/10

Revision No.

1.1


Model No. : KP2853R1H-DYSS

Drawing No.




KFC2282

4. Reliability Test


After test(1~7item), the speaker S.P.L . difference shall be within $\pm 3\text{dB}$, and the appearance not exist any change to be harmful to normal operation (e.g. cracks,rusts,damages and especially distortion).

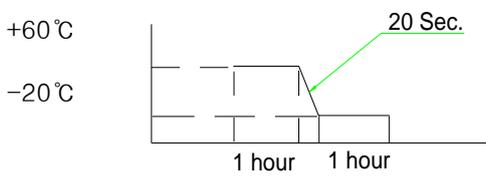No	Items	Specification
1	High Temperature Test	After being placed in a chamber with $+70\pm 3\text{ }^\circ\text{C}$ for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.
2	Low Temperature Test	After being placed in a chamber with $-30\pm 3\text{ }^\circ\text{C}$ for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.
3	Humidity Test	After being placed in a chamber with 85 to 90%R.H. at $+40\pm 2\text{ }^\circ\text{C}$ for hours and then being placed in natural condition for 1 hour, speaker shall be measured.
4	Thermal Shock Test	<p>After being placed in a chamber at $+60\text{ }^\circ\text{C}$ for 1 hour, then speaker shall be placed in a chamber at $-20\text{ }^\circ\text{C}$ for 1 hour(1 cycle is the below diagram). After 6 above cycles, speaker shall be measured after being placed in natural condition for 1 hour.</p>  <p style="text-align: center;"> $+60\text{ }^\circ\text{C}$ $-20\text{ }^\circ\text{C}$ </p> <p style="text-align: center;"> 1 hour 20 Sec. 1 hour </p>
5	Vibration Test	After being applied vibration of amplitude of 1.5mm with 10 to 55Hz band of vibration frequency to each of 3 perpendicular directions for 1 hour, then placed in natural condition for 1 hour, speaker shall be measured.
6	Drop Test	The receiver when mounted in the jig which weight 85g~100g, shall with stand 10 times random drops from a height of 1.5 meter to a concrete floor faced with 5mm thick hard wood board.and be nothing mechanical damage.
7	Load test	After being applied loading white noise with input power 0.01W(1.22Vrms.) for 96 hours, then placed in natural condition for 1 hour, speaker shall be measured.
8	Insulation test	When they are measured with DC 100V the insulation resistance between v.c. terminal and frame must be more than $1\text{ M}\Omega$


5. Measurement Block Diagram & Response curve

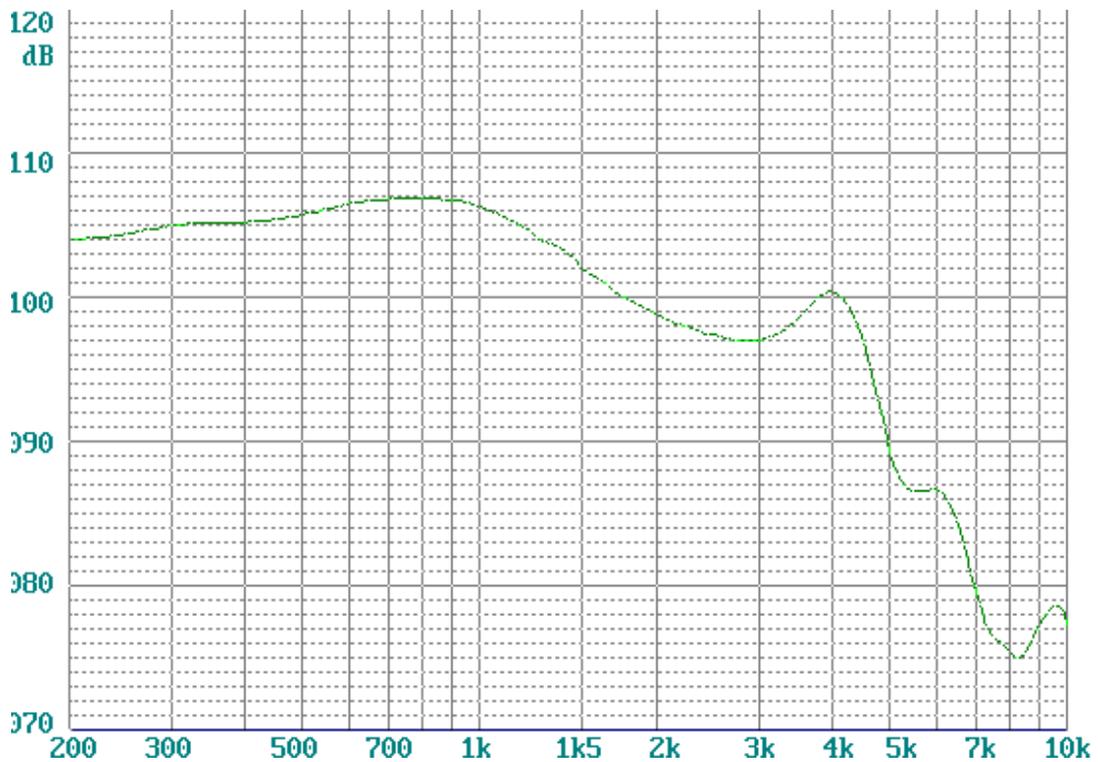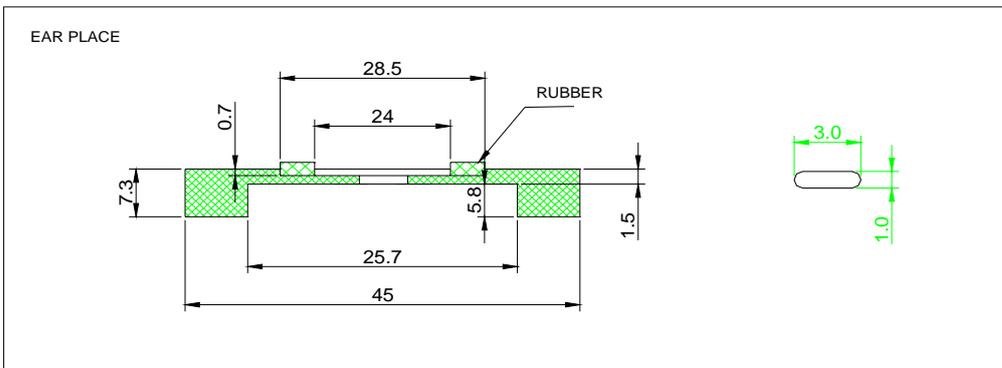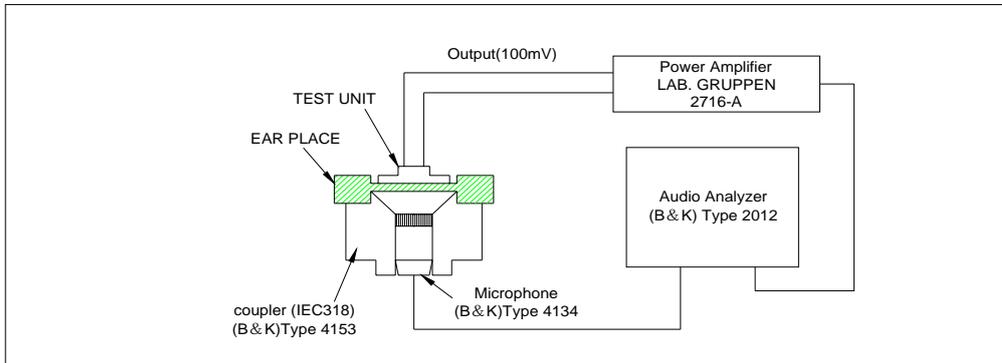

6.1 HAC Measurement Block Diagram

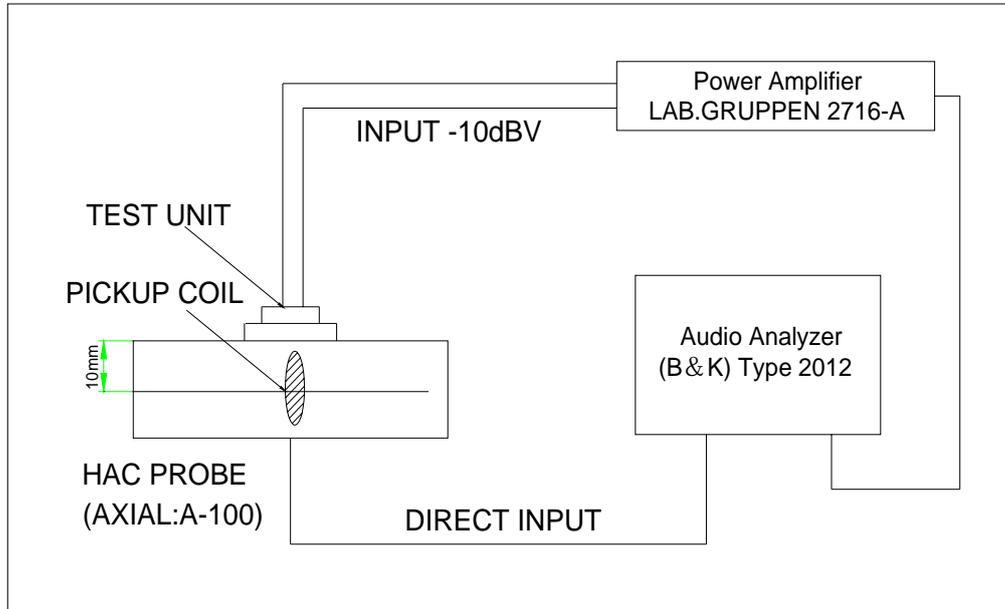

6.2 HAC Response curve

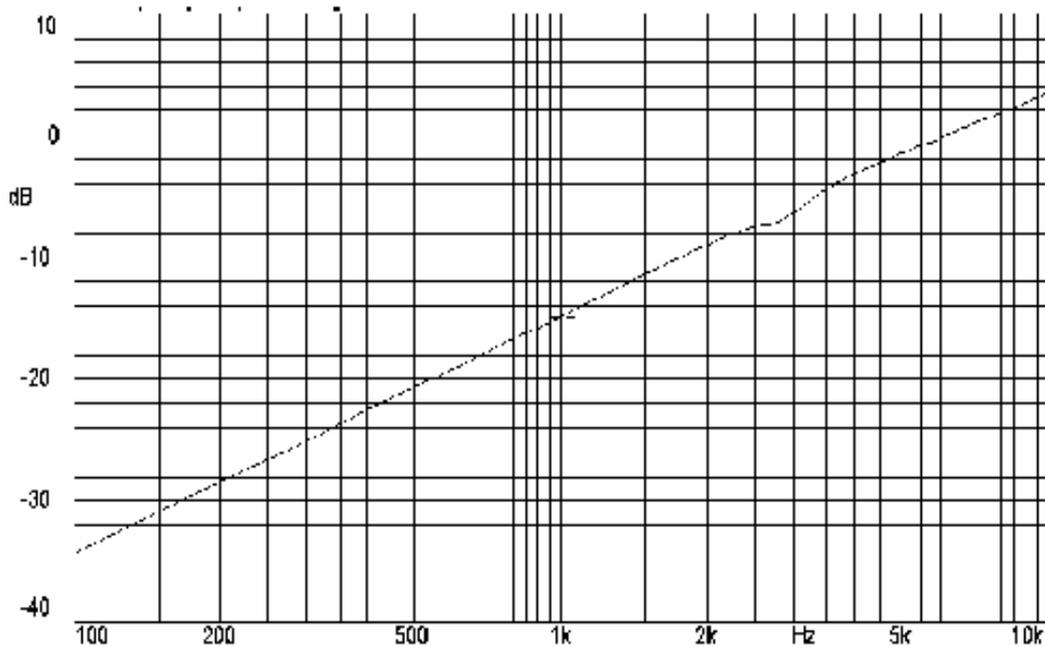

Specification for Receiver

Page

7/10

Revision No.


1.1

Model No. : KP2853R1H-DYSS

Drawing No.

KFC2282

7. Structure

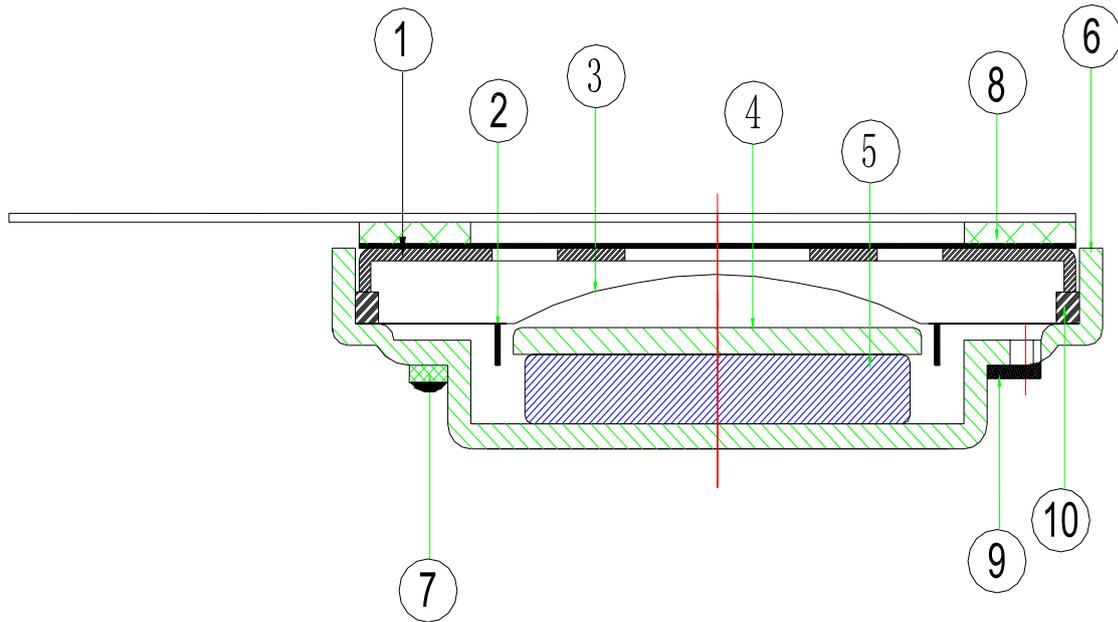

No.	Part Name	Q'ty	Material	Remarks
10	HAC coil	1	Copper	
9	Screen	1	unwoven fabric	
8	Gasket	1	unwoven fabric	unwoven fabric+PSR
7	Terminal	1	Epoxy PCB	
6	Frame	1	PBT	
5	Magnet	1	Nd-Fe-B	
4	Plate	1	SPC	
3	Diaphragm	1	PET	
2	Voice Coil	1	Copper	
1	Cap	1	ABS	

Specification for Receiver

Page

8/10

Model No. : KP2853R1H-DYSS


Revision No.

1.1


Drawing No.

KFC2282

7. Dimensions

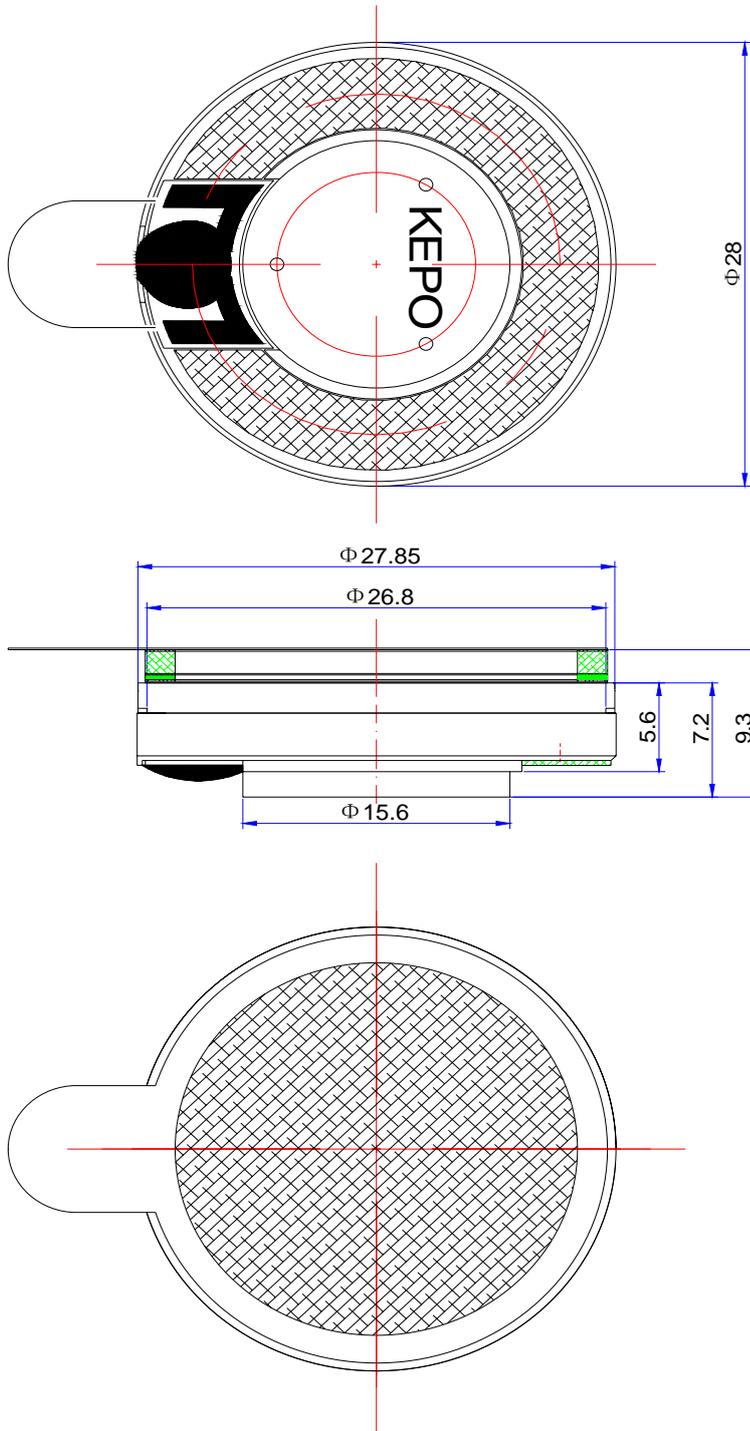

FIRST ANGLE PROJECTION



UNIT : mm

Tolerance : ± 0.2

Specification for Receiver

Page

9/10

Model No. : KP2853R1H-DYSS


Revision No.

1.1



Drawing No.

KFC2282

8. Packing

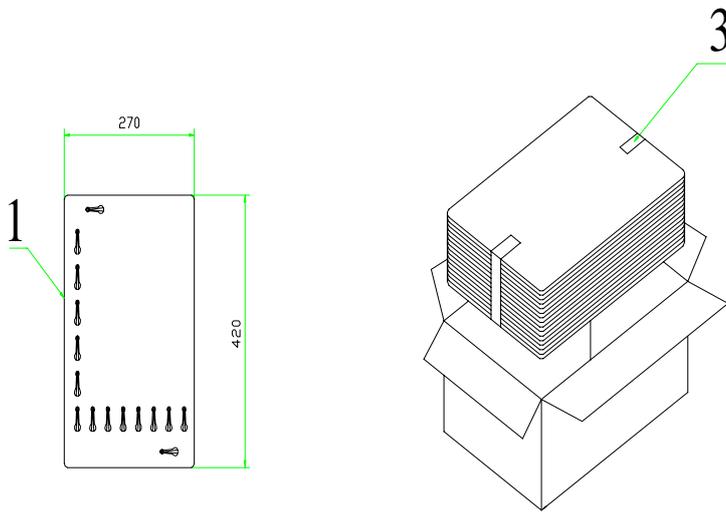

75Pcs

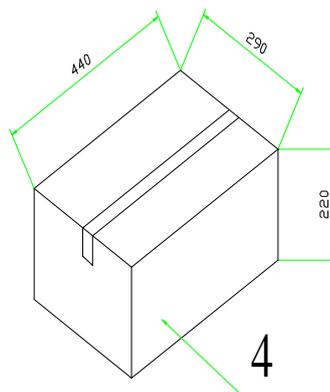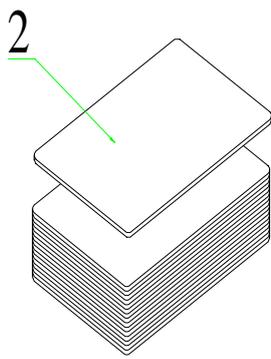

QTY: 1125Pcs

440 x290 x220