


SPECIFICATION

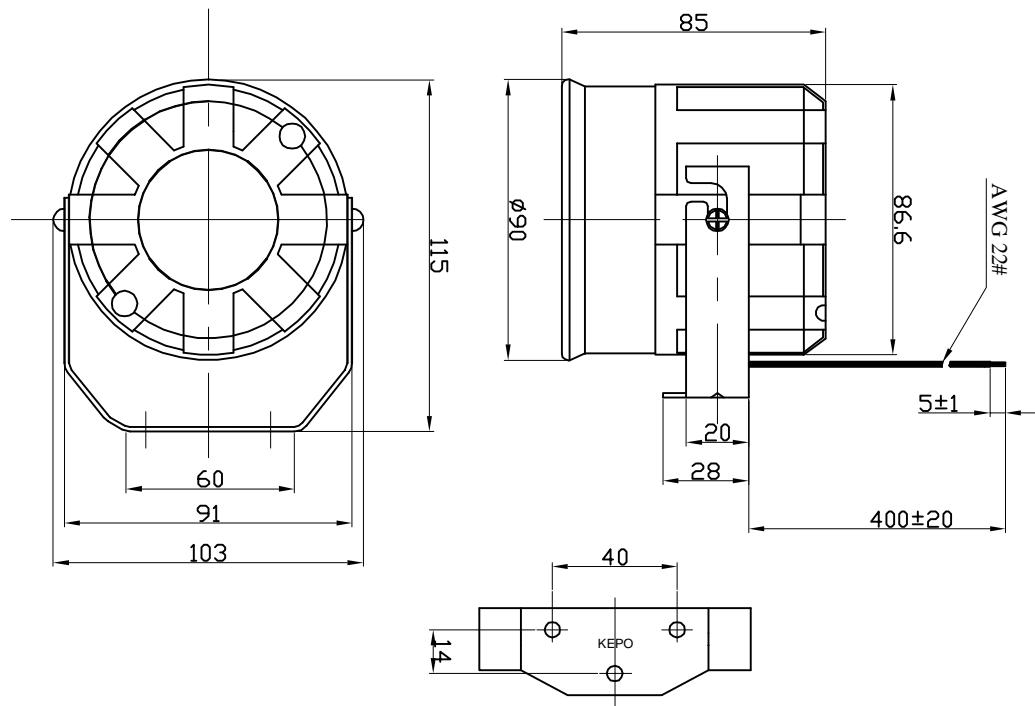

- | | |
|-------------------------------|-------------------------|
| 1.Rated Voltage | 12VDC |
| 2.Operating Voltage | 8~15VDC |
| 3.Max.Rated Current | 650mA at 12VDC |
| 4.Min.Sound Pressure Level. | 112dB at 12VDC/100cm |
| 5.Tone Nature..... | Siren |
| 6.Shell Material/color | ABS/Black |
| 7.Operating Temperature | -20~+60°C |
| 8.Wires connection..... | Red +12VDC
Black GND |
| 9.Store Temperature | -30~+70°C |
| 10.Weight | 200g |
| 11.Wires Connection | Red +12V
Black GND |

KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
Electronic siren KPS-91G-PZ(With KEPO)			
No.	DESCRIPTION	APPROVED	DATE
TOLERANCE/NESNESS XX = XXX = 90° KNOWN $\pm 2^\circ$	APPROVALS	DATE	
FIRST ANGLE PROJECTION	DRAWN CHECKED	UNIT mm	DWG NO. KP3.840.440.06
	APPROVED	SCALE NOT TO SCALE	SHEET VIR 1.0