

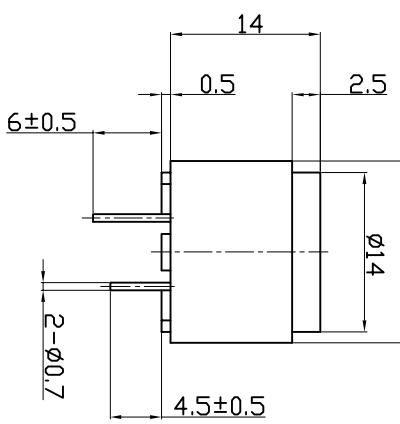



1      2      3      4      5      6      7      8

## SPECIFICATION

- 1.Rated Voltage ..... 5VDC
- 2.Operating Voltage ..... 4~8VDC
- 3.Max.Rated Current ..... 30mA/5VDC
- 4.Resonant Frequency ..... 2300±300Hz
- 5.Min.Sound Pressure Level ..... 85dB/10cm
- 6.Response Time ..... 50ms
- 7.Case Material ..... MPP0
- 8.Operating Temperature ..... -20~+70°C
- 9.Store Temperature ..... -30~+80°C
- 10.Weight ..... 7g

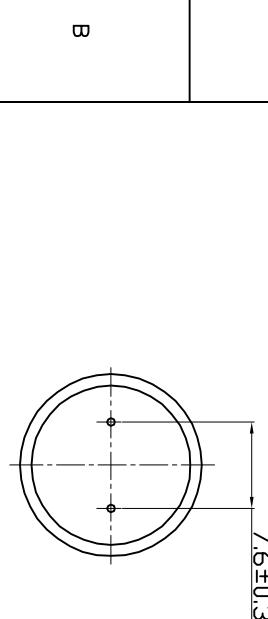

F

**KPX-1605A**  
Magnetic Buzzer

KEPO NINGBO KEPO ELECTRONIC CO.,LTD		<a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
No.	DESCRIPTION	APPROVALS	DATE
X	TOLERANCE/DEVIATION	DRAWN	
XX	±	CHECKED	
XXX	=		
90°	∠2°		
WIRE ANGLES	∠1°		
FIRST ANGLE PROJECTION			
APPROVED	05.03.05	SCALE	SHEET
	NOT TO SCALE		VER 1.1
1	2	3	4
5	6	7	8

A

B

C

D

E

F