



SPECIFICATION

1. Rated Voltage 5 VDC
2. Operating Voltage 3~7 VDC
3. Max. Rated Current 30mA/5VDC
4. Min. Sound Pressure Level 80dB/10cm
5. Resonant Frequency 2300±300HZ
6. Response Time 50ms
6. Case Material PBT
7. Operating Temperature -20~+70℃
8. Store Temperature -30~+80℃
9. Weight 0.8g

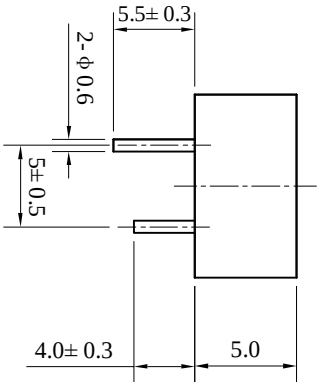

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
				Magnetic Buzzer			
				KPX-9050A			
No.	DESCRIPTION	APPROVED	DATE				
TOLERANCE UNITS NOTED OTHERWISE XX ± XXX ± 90° ANGLES ±°		APPROVALS	DATE				
		DRAWN					
		CHECKED					
FIRST ANGLE PROJECTION		APPROVED					
			05.12.21				
		SCALE					
		NOT TO SCALE					
		SHEET					
		VER.	1.0				