

# SPECIFICATION

## FOR APPRONAL

Customer : \_\_\_\_\_

Product Name : Magnetic Buzzer \_\_\_\_\_

Model Name : VSMB2624L-W \_\_\_\_\_

Drawing No. : VS20210910006 \_\_\_\_\_

### Signature of Voise

Approved by	Checkde by	Issued by	Date



**福爱斯电子有限公司**  
VOISE ELECTRONICS CO.,LTD.

Office Add:Haoyangguang B-302# No.968 Baizhang Road,Ningbo China

Factory add: Shishan Industrial Park Moushan Town Yuyao City China

Tel:86-0574-87471601 Fax:86-0574-87471603 P.C.315000

Http://www.nbvoise.com E-mail:sales@nbvoise.com



<b>Specification for Magnetic Buzzer</b>	Page	3/5
	Revision No.	1.0
Model No. : VSMB2624L-W	Drawing No.	VS20210910006

## 2. Scope

This specification is applied to the siren used for sounder in alarm systems, Please contact us when using this product for any other applications than described in the above.

## 3. General

- 3.1 Out-Diameter : 26 mm
- 3.2 Height : 17.5 mm
- 3.3 Weight : 12 ±3g
- 3.4 Operating Temperature range:  
-20~+60°C without loss of function
- 3.5 Store Temperature range:  
-30~+70°C without loss of function

## 4. Electrical and Acoustic Characteristics.

Test condition : 15 ~ 35 °C, 25% ~ 85% RH, 860~1060 mbar

No	Items	Specification
1	Rated Voltage	24V DC
2	Working Voltage	18-27VDC
3	Max Rated Current	30mA/24VDC
4	Min Sound Pressure Level	80dB/24VDC/20cm
5	Resonant Frequency	400±100Hz
6	Housing Material	ABS
7	Color	White

# Specification for Magnetic Buzzer

Page

4/5

Revision No.


1.0

Model No. : VSMB2624L-W

Drawing No.

VS20210910006

## 5. Dimensions

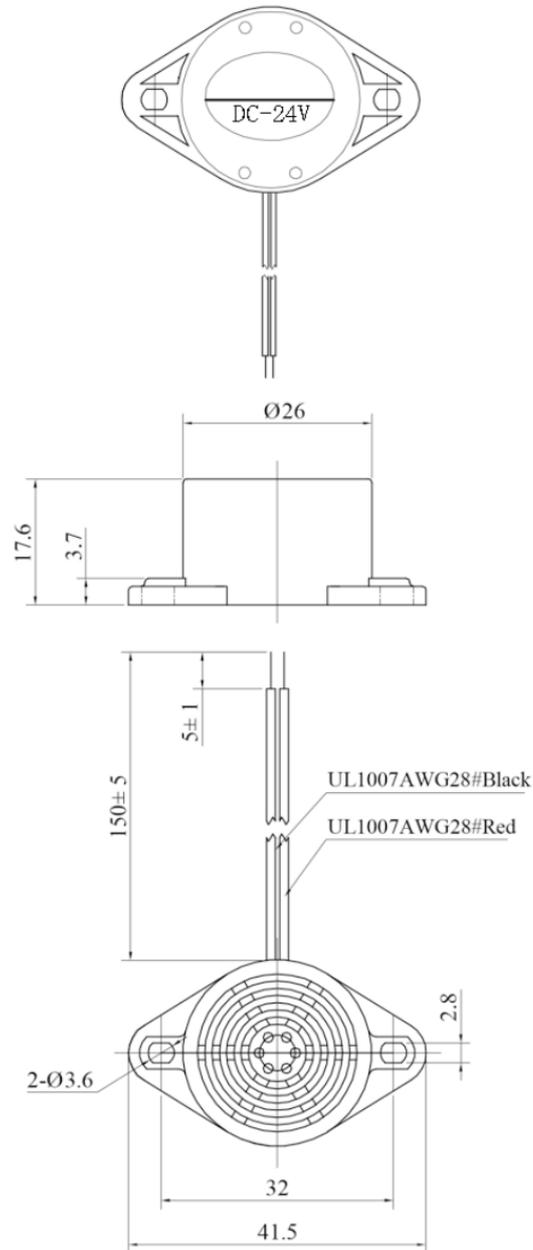

FIRST ANGLE PROJECTION



UNIT : mm

Tolerance : ±1.5

Specification for Magnetic Buzzer	Page	5/5
	Revision No.	1.0
Model No. : VSMB2624L-W	Drawing No.	VS20210910006

## 6. Packing

Each minimum package unit of products shall be in a carton box and it shall be clearly marked with Part Number ,quantity and outgoing inspection number.

There shall be no mechanical damage on products during in storage.

Total:200 pcs per box  
Size:41.5x27x31cm